










DISPLAY	0.56 inch LED
ACCURACY	± 0.5%
AUX. POWER	AC. 110V or 220V
TEMPERATURE RANGE	-10°C ~ +50°C
DIELECTRIC STRENGTH	AC. 2KV/1 min.
ITEM PICTURE	FUNCTION & MEASUREMENT
 DM-96E  DM-72E	<ul style="list-style-type: none"> ■ AC. VOLTMETER ● MEASUREMENT RANGE: 0 - 600V ■ AC. AMMETER ● MEASUREMENT RANGE: (SINGLE RANGE, SELECT AS BELOW) 10A/5A, 15A/5A, 20A/5A, 25A/5A, 30A/5A, 40A/5A, 50A/5A, 60A/5A, 70A/5A, 75A/5A, 80A/5A, 100A/5A, 120A/5A, 150A/5A, 150A/5A, 160A/5A, 200A/5A, 250A/5A, 300A/5A, 400A/5A, 500A/5A, 600A/5A, 700A/5A, 750A/5A, 800A/5A, 1000A/5A, 1200A/5A, 1500A/5A, 1600A/5A, 2000A/5A. ■ FREQUENCYMETER ● MEASUREMENT RANGE: 0 - 600V 45 - 65 Hz

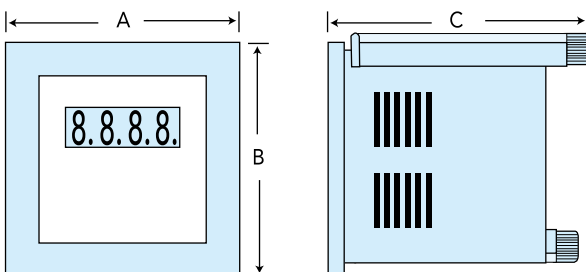DIMENSIONS (mm)




ITEM NO.	A	B	C	PANEL HOLE
DM - 96E	96.5	96.5	64	92 ^{+0.8}
DM - 72E	72	72	80	68 ^{+0.2}




DISPLAY	DM - 80E	0.8 inch LED
	DM - 60E	0.56 inch LED
	DM - 50E	0.4 inch LED
	DM - 7042E	0.56 inch LED
ACCURACY		± 0.5%
TEMPERATURE RANGE		-10°C ~ +50°C
DIELECTRIC STRENGTH		AC. 2KV/1 min.
ITEM NO. & PICTURE		FUNCTION & MEASUREMENT
 DM-80E  DM-60E  DM-50E  DM-7042E		<p>■ VOLTMETER</p> <ul style="list-style-type: none"> • AC. 80V ~ 300V (under AC. 80V can not display or display error) • DC. 2.5V ~ 30V (under DC. 2.5V can not display or display error) • DC. 0V ~ 99.9V (AUX. POWER: 2.5V ~ 30V DC.) <p>■ AMMETER</p> <ul style="list-style-type: none"> • AC. 0 - 60A Direct (AUX. POWER: 110V or 220V AC.) • DC. 0 - 30A Direct (AUX. POWER: 2.5V ~ 30V DC.) <p>■ FREQUENCYMETER</p> <ul style="list-style-type: none"> • AC. 80V ~ 300V 30Hz ~ 99.9Hz

DIMENSIONS (mm)

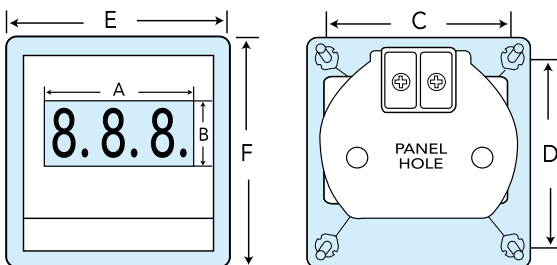

ITEM NO.	A	B	C	D	E	F	PANEL HOLE
DM - 80E	59	25	65	65	79	79	58
DM - 60E	37.5	18	48	48	60	60	52
DM - 50E	30	12.5	38	38	51	51	45

● **DM-7042E**

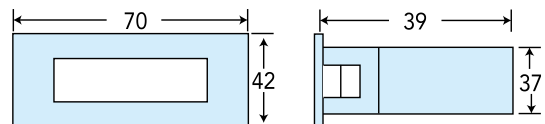

★ PANEL HOLE: 68 X 38 (W X H)