



KF-06 LEVEL REGULATOR



May be used for direct level control, in accordance with product electrical specifications.

In the case of approved products, the ground wire will always be included and the ground wire sheath will always be yellow/green. In this case, the two remaining wires are supplied for "high closure" or, specific request, "low closure".

INSTRUCTIONS FOR INSTALLATION

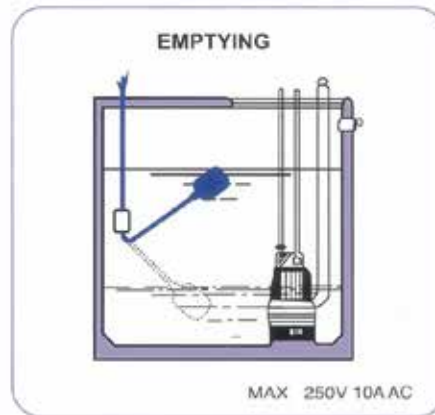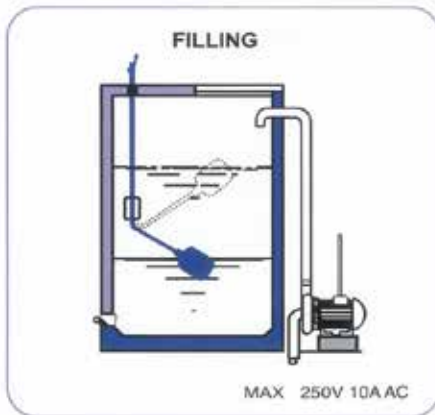

ELECTRICAL CONNECTIONS

Use wires:
"Black" and "Blue"
With these contacts the regulator
Closes when down
Opens when up

Use wires:
"Black" and "Brown"
With these contacts the regulator
Closes when up
Opens when down

The wire that is not used must be correctly insulated

- 1 Insert the cable in the counterweight, from the conical part and rotate it, thus causing the plastic ring inserted in the opening to become detached (if necessary this operation can be facilitated with the use of a screwdriver). The ring should then be positioned in the point where it is desired to block the counterweight.
- 2 Force the counterweight on the ring by rotating it, using a slight pressure.

THE COUNTERWEIGHT IS FURNISHED ONLY ON REQUEST.

**AVOID JOINTS IN THE LEVEL REGULATOR CABLE.
NEVER IMMERGE POSSIBLE CABLE JOINTS IN THE WATER.**

INSTALLATION OF COUNTERWEIGHT

