



expansion module I(N),I(Diff),analog N conductor measurement, residual current measurement, 2 analog inputs, plug-in, for 7KM PAC3200 / 4200

Model			
product brand name	SETRON		
product designation	I(N),I(Diff) expansion module, analog N conductor measurement, differential current measurement, 2 analog inputs		
type of voltage supply	via PAC 3200 / PAC4200		
General technical data			
galvanic isolation	Maximum insulation voltage: 500V AC		
degree of pollution	2 according to IEC 61131		
Protection class			
protection class IP	IP20		
combustibility class according to UL 94	V 0		
suitability for use	7KM PAC 3200 / PAC 4200		
<ul style="list-style-type: none"> reactive power meter 	No		
Connections			
type of electrical connection	screw-type terminals		
Mechanical Design			
height	63 mm		
width	43 mm		
depth	34 mm		
fastening method	pluggable		
Environmental conditions			
ambient temperature / during operation			
<ul style="list-style-type: none"> minimum maximum 	-10 °C 55 °C		
ambient temperature / during storage			
<ul style="list-style-type: none"> minimum maximum 	-25 °C 70 °C		
General Product Approval		EMC	Declaration of Conformity

[Confirmation](#)

[KC](#)



other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7KM9200-0AD00-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/7KM9200-0AD00-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM9200-0AD00-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

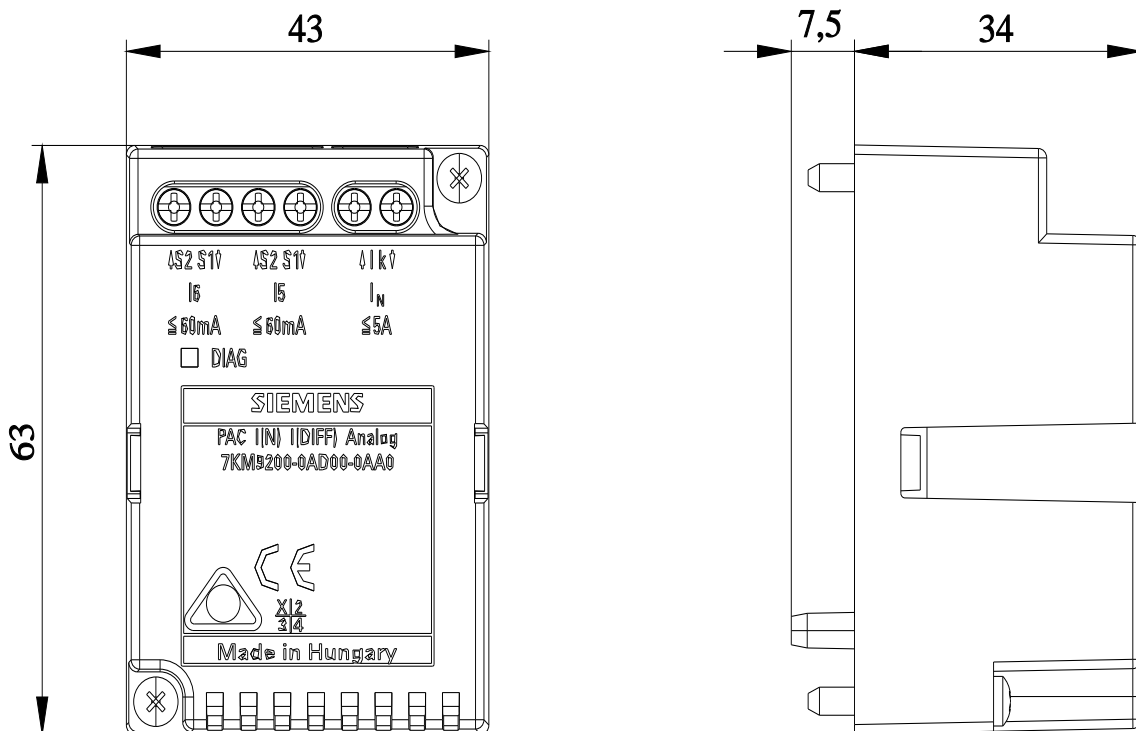

-P

SIEMENS

I5	S1	I5	S2	I6	S1	I6	S2	In	k	In	1
----	----	----	----	----	----	----	----	----	---	----	---



