

Product data sheet

Specifications



NEMA Motor Starter and contactor, Type S, auxiliary contact, 1 NO contact, external, field convertible

9999SX6

Product availability : Stock - Normally stocked in distribution facility

Price* : 86.00 USD

Main

Product Range	Type S
Component type	Auxiliary Contact Module
Used with	contactor starter

Complementary

NEMA size	0 3 6 7 4 5 1 00 2
Auxiliary contact composition	1 NO
[Uc] control circuit voltage	<= 600 V AC 50/60 Hz
Rated breaking capacity	6 A 120 V AC inductive control circuit UL 508 3 A 240 V AC inductive control circuit UL 508 1.2 A 600 V AC inductive control circuit UL 508 1.5 A 480 V AC inductive control circuit UL 508 10 A <= 600 V AC resistive control circuit UL 508
Height	1.5 in (38.10 mm)
Width	3 in (76.20 mm)
Depth	4.5 in (114.30 mm)
Net Weight	0.20 lb(US) (0.09 kg)

Environment

Product Certifications	CSA UL Listed UL Recognized
------------------------	-----------------------------------

Ordering and shipping details

Category	21761-9999 DISCOUNT CP1
Discount Schedule	CP1
GTIN	785901733300
Nbr. of units in pkg.	1

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package weight(Lbs)	3.20 oz (90.719 g)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.50 in (3.81 cm)
Package 1 width	3.10 in (7.874 cm)
Package 1 Length	4.60 in (11.684 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	21
Package 2 Weight	12.40 lb(US) (5.625 kg)
Package 2 Height	8.00 in (20.32 cm)
Package 2 width	11.30 in (28.702 cm)
Package 2 Length	14.20 in (36.068 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

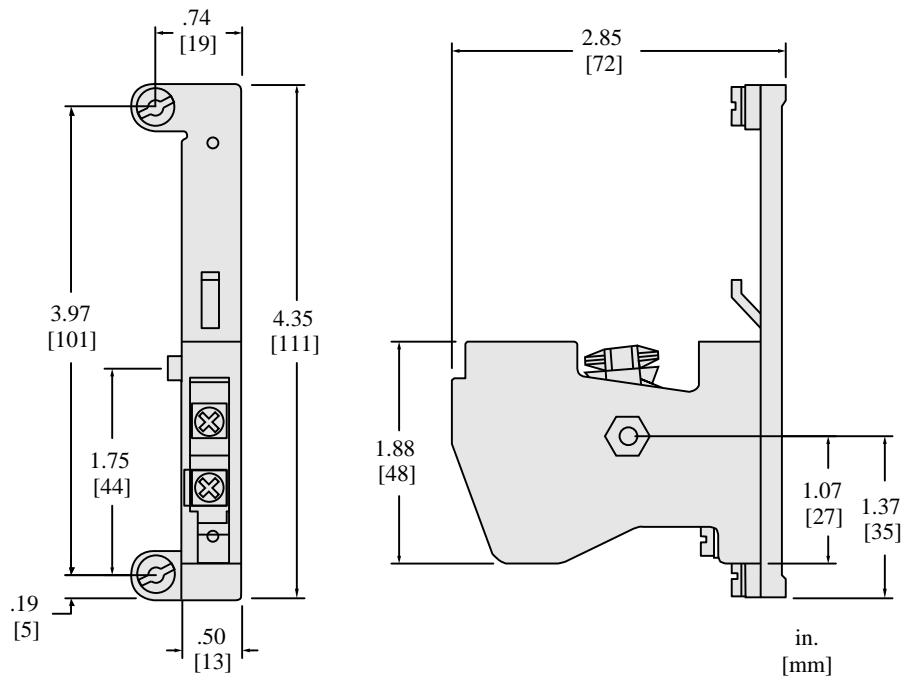

Auxiliary Contact Block

NEMA CONTACTOR SIZE	NO. OF POWER POLES OF BASIC CONTACTOR	MAX. NO. OF EXTERNAL AUX. UNITS. (INTERNAL OR EXT.)
0, 1, and 2	1, 2, or 3	4 SINGLE CIRCUIT (N.O. OR N.C.)
		3 SINGLE CIRCUIT (N.O. OR N.C.) PLUS 1 TIMER (ON OR OFF DELAY)
		2 SINGLE CIRCUIT (N.O. OR N.C.) PLUS 1 POWER POLE (1 OR 2 N.O. OR N.C.)
		1 ATTACHED TIMER (ON OR OFF DELAY) PLUS 1 AUX CONTACT
	4 or 5	2 SINGLE CIRCUIT (N.O. OR N.C.) PLUS 1 TIMER PLUS 1 AUX

Dimensions are approximate. Refer to technical documentation for additional detail.