

Product data sheet

Specifications



Lineryg FT - Comb busbar - 63 A - 4 tap-offs - 54 mm pitch



GV2G454

Main

| | |
|---|--|
| Range | Lineryg |
| Product name | FT |
| Device short name | GV2G |
| Product or component type | Comb busbar |
| Accessory / separate part category | Connection accessory |
| Poles description | 3P |
| Range compatibility | TeSys D TeSys GV2 TeSys K TeSys U |
| Number of tap-offs | 4 |
| [Ith] conventional free air thermal current | 63 A |
| Connection pitch | 54 mm |

Complementary

| | |
|-------------------------------|-------------|
| Mounting location | On terminal |
| [Ui] rated insulation voltage | 690 V |
| Length | 206 mm |
| Net weight | 0.085 kg |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 86 g |
| Package 1 Height | 1.9 cm |
| Package 1 width | 3.7 cm |
| Package 1 Length | 21.6 cm |
| Unit Type of Package 2 | P06 |
| Number of Units in Package 2 | 1600 |
| Package 2 Weight | 156.5 kg |

| | |
|------------------------------|---------|
| Package 2 Height | 75 cm |
| Package 2 width | 60 cm |
| Package 2 Length | 80 cm |
| Unit Type of Package 3 | S01 |
| Number of Units in Package 3 | 50 |
| Package 3 Weight | 4.51 kg |
| Package 3 Height | 15 cm |
| Package 3 width | 15 cm |
| Package 3 Length | 40 cm |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

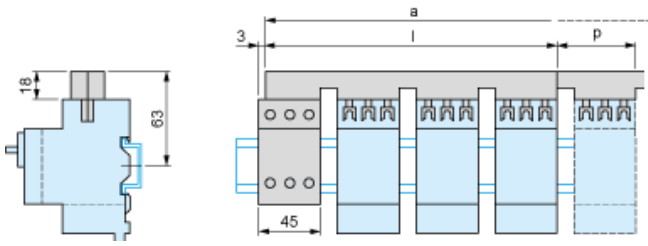

| | l | p |
|---------------------|-----|----|
| GV2G445 (4 x 45 mm) | 179 | 45 |
| GV2G454 (4 x 54 mm) | 206 | 54 |
| GV2G472 (4 x 72 mm) | 260 | 72 |

| Number of tap-offs | a | | | |
|--------------------|-----|-----|-----|-----|
| | 5 | 6 | 7 | 8 |
| GV2G445 | 224 | 269 | 314 | 359 |
| GV2G454 | 260 | 314 | 368 | 422 |
| GV2G472 | 332 | 404 | 476 | 548 |