

# Remote control cable, Harmony SCU, 3 m for panel

HMIZSURDP

#### Main

Range of product	Harmony SCU
Product or component type	Remote control cable

## Complementary

Cable length	3 m
Height	105.4 mm
Width	131.33 mm
Depth	23.75 mm
Net weight	0.689 kg

#### **Packing Units**

Facking Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	670.0 g
Package 1 Height	7.2 cm
Package 1 width	18.4 cm
Package 1 Length	26.7 cm
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Weight	4.02 kg
Package 2 Height	30.0 cm
Package 2 width	30.0 cm
Package 2 Length	40.0 cm
Unit Type of Package 3	P12
Number of Units in Package 3	96
Package 3 Weight	64.32 kg
Package 3 Height	75.0 cm
Package 3 width	80.0 cm
Package 3 Length	120.0 cm


#### Offer Sustainability

REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

## **HMIZSURDP**

**Dimensions Drawings** 

#### **Dimensions**

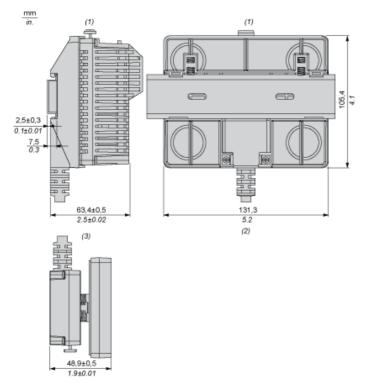



- (1) (2) (3) Rear module
- Rear module remote cable
- Panel remote cable

## **HMIZSURDP**

Mounting and Clearance

#### **Recommended Mounting position**

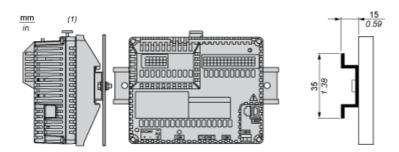




- Horizontal mounting
- (1) (2) Vertical mounting

## **HMIZSURDP**

Mounting and Clearance


#### No Recommended Mounting Position



## **HMIZSURDP**

Mounting and Clearance

#### Clearance

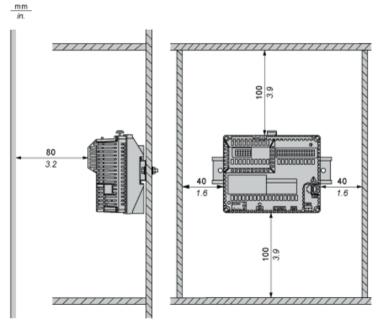

Keep adequate spacing for proper ventilation to maintain an ambient temperature between 0...50  $^{\circ}$ C (32...122  $^{\circ}$ F) for horizontal installation and 0...40  $^{\circ}$ C (32...104  $^{\circ}$ F) for vertical installation.