




Characteristics:

- 1 It comprises of a axial fan, a protective housing on the front and rear surfaces and filter designed to retain dust particles.
- 2 The filters that equip the fans must be cleaned and replaced regularly.
- 3 It can produce all kinds of flame retardant V0 grade material and filter panel.
- 4 Material of filter pad: 100g/ M3 nylon fiber compound, Filtration efficiency up to 73%.
- 5 Operation Temperature/Humidity Range: (under unconcretionary state) -20°C ~ +70°C (temperature), 0% ~ 95% (himidity)
- 6 RAL 7035 grey is the standard offer with the possibility to change to RAL 7032 by means of a replacement grille.
- 7 Bear in mind the pressure losses caused by the outlet element (grille with filter, ventilation louvre or simple opening) when determining the fan flow rate.
- 8 Protection class: E N 60 5 29 IP 5 4 (not suitable for outdoor equipment).


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

V0
100g/ M3 70 %
/
0%~95% -20 ~+70
6 RAL7035 RAL7032
8 EN 60 5 29 IP 5 5

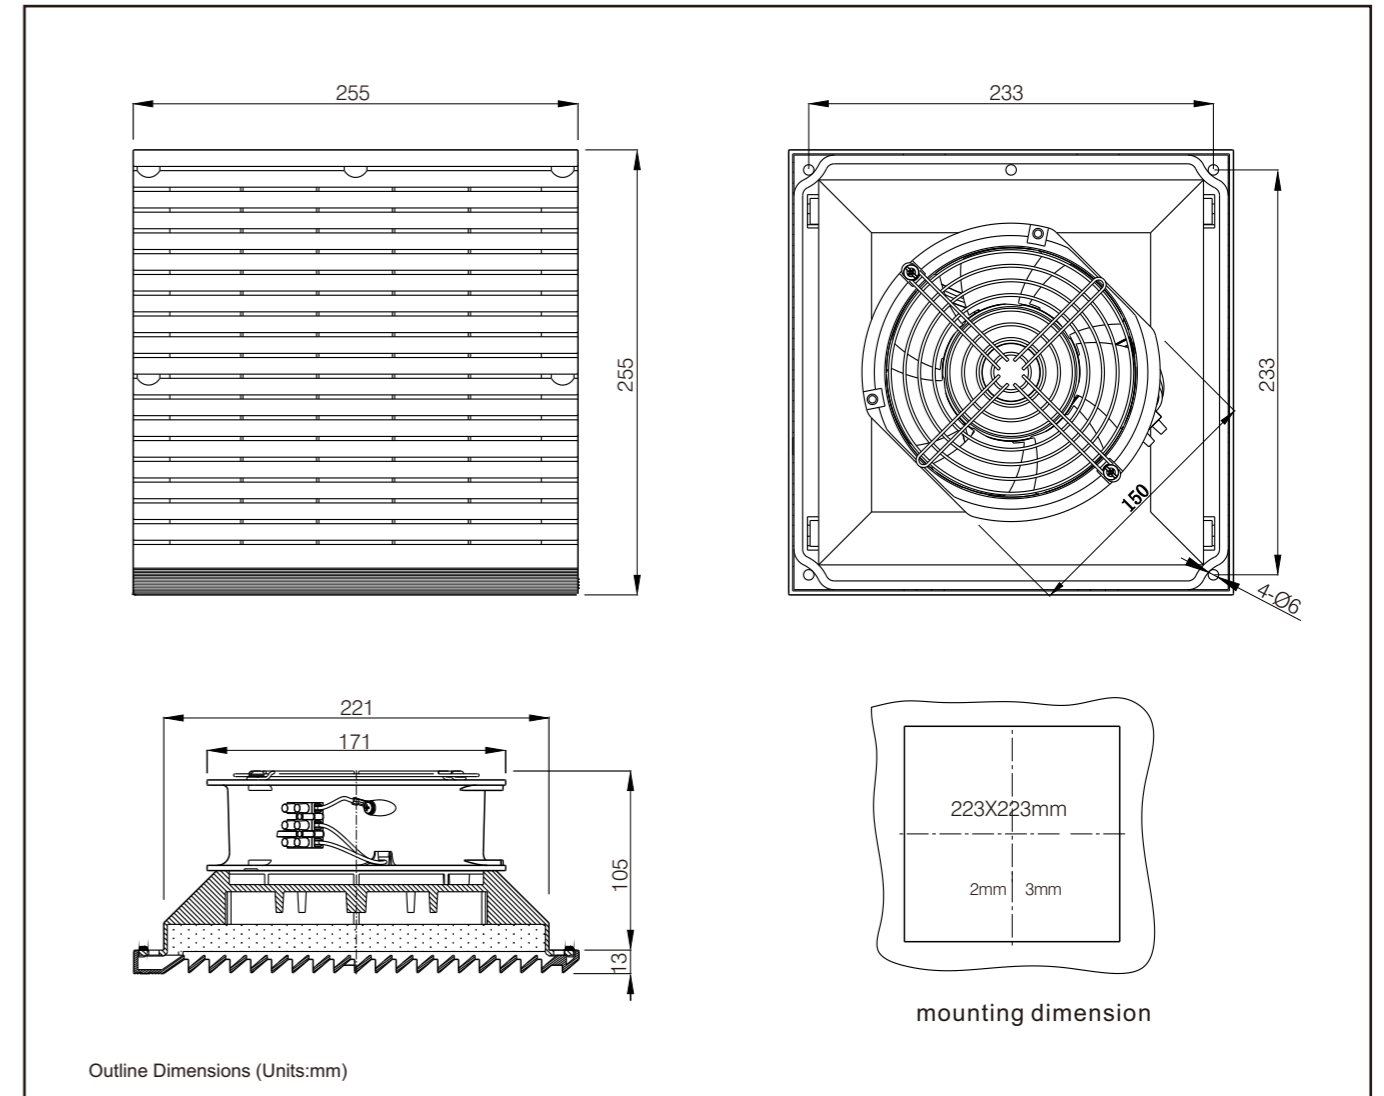

- A installation: Snap-in and screw installation
- B Power connection: Terminal connection
- C With seal ring
- D Maximum weight: 1.45kg

- A
- B
- C
- D 1.45kg

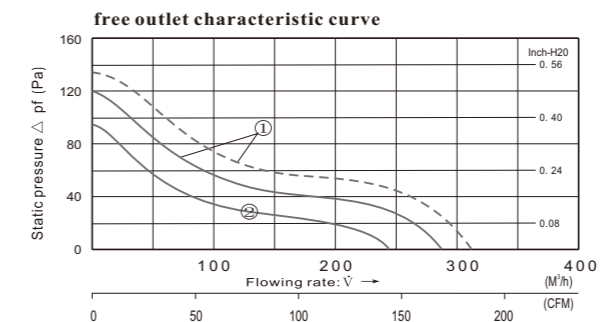

Parameters

Type	Fan Model	Rated Voltage	Speed	Frequency	current	Power	Max Air Flow	Static Pressure	Noise	Curve	external dimensions (mm)
		V	V	Hz	(A)	(W) _{10% 20%}	m3/h	(Pa)	(dB)		
FJK6625PB115	FJ15051ABH	115 AC	75...125	50	0.48	41	280	120	48	①	255x255x117
				60	0.46	38	320	135	50		
FJK6625PB230	FJ15052ABH	230 AC	150...250	50	0.26	41	280	120	48		
				60	0.24	38	320	135	50		
FJK6625PB12	FJ15050PB12	12 DC	8...15		1.05	12	245	95	48	②	
FJK6625PB24	FJ15050PB24	24 DC	12...28		0.50	12	245	95	48		
FJK6625PB48	FJ15050PB48	48 DC	28...60		0.24	11.5	245	95	48		