

FICHA TECNICA




Producto : Conmutador Estrella Triangulo
 Marca : Salzer
 Modelo : S25-61200
 Amps : 25A
 Polos : 3
 Certificac. :    



S25-61200

AC Rating Code	Unit	S25 RT25	
Rated Operational Voltage(Ue)	V	690	
Rated frequency	Hz	50/60	
Rated impulse withstand Voltage(Uimp)	Kv	6	
Rated Operational Current(Ie) AC21/AC1	A	25	
Rated Uninterrupted Current (Ith)	A	32	
Rated Operational Power			
AC23A "3 Ph , 415 V"	KW	11	
	A	19	
AC3	KW	7.5	
"3 Ph , 415 V"	A	13	
Short Circuit Capacity			
Rated Fuse Short Circuit Current	KA	10	
Fuse Size (Type gG/gM)	A	25	
Terminal Cross Section			
Single / Multiple	min	mm ²	1.5
	max	mm ²	4
Fine strand	min	mm ²	1
	max	mm ²	2.5
Terminal Cross Section	Metric	M4	
Terminal Tightening Torque	Nm	1.2	

Script Plate Marking/ Operating Quadrant

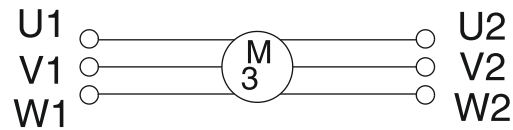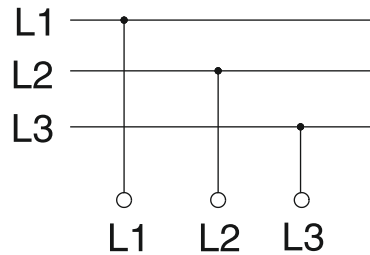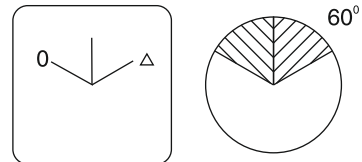

CSA/UL Ratings

AC Rating Code	Unit	S25 RT25
Ampere Rating	A	20
Operational Voltage	V	600
HP Rating 1 Phase	HP	1.5
	HP	3
	HP	3
3 Phase	HP	7.5
	HP	10
	HP	15

