


PRODUCT-DETAILS

# EF19-18.9

## EF19-18.9 Electronic Overload Relay

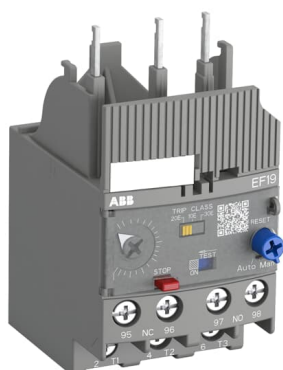

### Información General

|                            |                                     |
|----------------------------|-------------------------------------|
| Tipo de producto extendido | EF19-18.9                           |
| Código de producto         | 1SAX121001R1105                     |
| EAN                        | 4013614404023                       |
| Descripción corta          | EF19-18.9 Electronic Overload Relay |

|                   |   |
|-------------------|---|
| Descripción larga | <p>The EF19-0.32 is a self-supplied electronic overload relay, which means no extra external supply is needed. It offers reliable and fast protection for motors in the event of overload or phase failure. Easy to use like a thermal overload relay and compatible with standard motor applications, the electronic overload relay is convincing, above all, due to its wide setting range, high accuracy, high operational temperature range and the possibility to select a trip class (10E, 20E, 30E). Further features are the temperature compensation, trip contact (NC), signal contact (NO), automatic- or manual reset selectable, trip-free mechanism, STOP- and Test function and a trip indication. The overload relays are connected directly to the contactors. Single mounting kits are available as accessory. The EF19 and EF45 have ATEX and IECEx certification 1)</p> |
|-------------------|---|

1) ATEX is valid for products produced from week 42, 2014.  
IECEx is valid for products produced from week 15, 2017.

### Clasificación

|                           |          |
|---------------------------|----------|
| Cantidad mínima de pedido | 1 piece  |
| Código arancelario        | 85364900 |

### Descargas Populares

|                                    |                                    |
|------------------------------------|------------------------------------|
| Ficha técnica, información técnica | 2CDC107025D0201                    |
| Instrucciones y manuales           | 2CDC107023M6803                    |
| Instructions and Manuals (Part 2)  | 2CDC107043M6801                    |
| Time-Current Characteristic Curve  | 1SAX100509F0001<br>1SAX100510F0001 |
| Dimension Diagram                  | 1SAX100403F0001                    |

## Dimensiones

|                   |          |
|-------------------|----------|
| Ancho del product | 44.4 mm  |
| Alto del producto | 85 mm    |
| Largo del product | 59.3 mm  |
| Peso del product  | 0.158 kg |

## Technical

|  |  |
|--|--|
| Setting Range                                      | 5.7 ... 18.9 A   |
| Rated Operational Voltage                          | Auxiliary Circuit 600 V AC/DC<br>Main Circuit 690 V AC   |
| Rated Operational Current ( $I_e$ )                | 18.9 A   |
| Rated Operational Current AC-3 ( $I_e$ )           | 18.9 A   |
| Rated Frequency (f)                                | Auxiliary Circuit 50 Hz<br>Auxiliary Circuit 60 Hz<br>Auxiliary Circuit DC<br>Main Circuit 50 Hz<br>Main Circuit 60 Hz   |
| Rated Impulse Withstand Voltage ( $U_{imp}$ )      | Auxiliary Circuit 6 kV<br>Main Circuit 6 kV  |
| Rated Insulation Voltage ( $U_i$ )                 | 690 V  |
| Number of Poles                                    | 3  |
| Number of Auxiliary Contacts NC                    | 1  |
| Number of Auxiliary Contacts NO                    | 1  |
| Number of Protected Poles                          | 3  |
| Conventional Free-air Thermal Current ( $I_{th}$ ) | Auxiliary Circuit NC 6 A<br>Auxiliary Circuit NO 6 A   |
| Rated Operational Current AC-15 ( $I_e$ )          | (240 V) NC 3 A<br>(240 V) NO 3 A<br>(400 V) NC 1.1 A<br>(400 V) NO 1.1 A<br>(500 V) NC 0.75 A<br>(500 V) NO 0.75 A   |
| Rated Operational Current DC-13 ( $I_e$ )          | (125 V) NC 0.55 A<br>(125 V) NO 0.5 A<br>(24 V) NC 1.5 A<br>(24 V) NO 1.5 A<br>(250 V) NC 0.27 A<br>(250 V) NO 0.27 A<br>(60 V) NC 0.55 A<br>(60 V) NO 0.55 A              |
| Grado de protección                                | IP20   |
| Pollution Degree                                   | 3  |
| Connecting Capacity Auxiliary Circuit              | Flexible with Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible with Insulated Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible 1/2x 0.75 ... 2.5 mm <sup>2</sup> |

|                                     |  |
|-------------------------------------|--|
| Connecting Capacity<br>Main Circuit | Rigid 1/2x 1 ... 4 mm <sup>2</sup><br>Flexible with Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible with Insulated Ferrule 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Flexible 1/2x 0.75 ... 2.5 mm <sup>2</sup><br>Rigid 1/2x 1 ... 4 mm <sup>2</sup> |
| Tightening Torque                   | Auxiliary Circuit 0.8 ... 1.2 N·m<br>Main Circuit 0.8 ... 1.5 N·m  |
| Wire Stripping Length               | Auxiliary Circuit 9 mm<br>Main Circuit 9 mm  |
| Recommended Screw<br>Driver         | Auxiliary Circuit Pozidriv 2<br>Main Circuit Pozidriv 2  |
| Mounting Position                   | 1 ... 6  |
| Power Loss                          | at Rated Operating Conditions per Pole 0.028 ... 0.304 W   |
| Suitable For                        | AF09<br>AF12<br>AF16<br>AF26   |
| Standards                           | IEC/EN 60947-1<br>IEC/EN 60947-4-1<br>IEC/EN 60947-5-1<br>UL 60947-1<br>UL 60947-4-1   |

## Technical UL/CSA

|   |  |
|---|--|
| Maximum Operating<br>Voltage UL/CSA             | Main Circuit 600 V AC  |
| Ampere Rating UL/CSA                            | 18.9 A   |
| Contact Rating UL/CSA                           | (NC:) B600<br>(NC:) Q600<br>(NO:) B600<br>(NO:) Q600           |
| Connecting Capacity<br>Main Circuit UL/CSA      | Flexible 1/2x 16-10 AWG<br>Stranded 1/2x 16-10 AWG             |
| Connecting Capacity<br>Auxiliary Circuit UL/CSA | Flexible 1/2x 18-10 AWG<br>Stranded 1/2x 18-10 AWG             |
| Tightening Torque<br>UL/CSA                     | Auxiliary Circuit 7 ... 1 in·lb<br>Main Circuit 7 ... 13 in·lb |

## Ambiente

|   |  |
|---|--|
| Temperatura ambiente                              | Funcionamiento -25 ... +70 °C<br>Operation Compensated -25 ... +70 °C<br>Almacenamiento -50 ... +80 °C |
| Ambient Air<br>Temperature<br>Compensation        | Yes  |
| Maximum Operating<br>Altitude Permissible         | 2000 m   |
| Resistance to Shock acc.<br>to IEC 60068-2-27     | 11 ms Pulse 25g  |
| Resistance to Vibrations<br>acc. to IEC 60068-2-6 | 3g / 3 ... 150 Hz  |
| RoHS Status                                       | Following EU Directive 2011/65/EU  |

## Certificados y Declaraciones (Número de Documento)

|                  |                 |
|------------------|-----------------|
| ABS Certificate  | 1SAA941002-0102 |
| ATEX Certificate | 1SAA941004-3901 |
| BV Certificate   | 1SAA941002-0201 |
| CB Certificate   | 1SAA964002-2002 |
| CCS Certificate  | 1SAA941001-0901 |

|                                   |                                    |
|-----------------------------------|------------------------------------|
| CQC Certificate                   | CQC2008010309289447                |
| cUL Certificate                   | cUL_E48139                         |
| Declaration of Conformity - CCC   | 2020980309000285                   |
| Declaración de conformidad - CE   | 1SAD938519-0180                    |
| Declaration of Conformity - UKCA  | 1SAD938502-1180                    |
| DNV Certificate                   | 1SAA941003-0301                    |
| DNV GL Certificate                | 1SAA941003-0302                    |
| EAC Certificate                   | 1SAA941003-2701                    |
| Environmental Information         | 1SAC200096H0001                    |
| IECEX Certificate                 | 1SAA941000-4001                    |
| Instrucciones y manuales          | 2CDC107023M6803                    |
| Instructions and Manuals (Part 2) | 2CDC107043M6801                    |
| LR Certificate                    | 1SAA941002-0501                    |
| RINA Certificate                  | RINA_ELE376813CS                   |
| RMRS Certificate                  | 1SAA964000-0703                    |
| RoHS Information                  | 1SAD938513-0180                    |
| Time-Current Characteristic Curve | 1SAX100509F0001<br>1SAX100510F0001 |
| UL Certificate                    | UL_E48139                          |

## Información de Embalaje

|                                |               |
|--------------------------------|---------------|
| Embalaje Nivel 1 Unidades      | 1 piece       |
| Embalaje Nivel 1 Ancho         | 91 mm         |
| Embalaje Nivel 1 Alto          | 51.5 mm       |
| Embalaje Nivel 1 Largo         | 68 mm         |
| Embalaje Nivel 1 Peso          | 0.183 kg      |
| Embalaje Nivel 1 EAN           | 4013614404023 |
| Package Level 2 Units          | 100 piece     |
| Package Level 2 Width          | 463 mm        |
| Package Level 2 Height         | 276 mm        |
| Package Level 2 Depth / Length | 263 mm        |
| Package Level 2 Gross Weight   | 18.863 kg     |
| Package Level 2 EAN            | 4013614483301 |

## Clasificaciones

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Object Classification Code         | F                                    |
| ETIM 4                             | EC001080 - Electronic overload relay |
| ETIM 5                             | EC001080 - Electronic overload relay |
| ETIM 6                             | EC001080 - Electronic overload relay |
| ETIM 7                             | EC001080 - Electronic overload relay |
| eClass                             | V11.0 : 27371502                     |
| UNSPSC                             | 39121520                             |
| IDEA Granular Category Code (IGCC) | 5364 >> Overload relay               |
| E-Number (Finland)                 | 3706155                              |
| E-Number (Sweden)                  | 3224184                              |

## Accessories

| Identifier      | Description                 | Type        | Quantity | Unit Of Measure |
|-----------------|-----------------------------|-------------|----------|-----------------|
| 1SAX101910R1001 | DB19EF Single Mounting Kit  | DB19EF      | 1        | piece           |
| 1SAX101911R1001 | DRS-F-01 Remote Reset Coil  | DRS-F-01    | 1        | piece           |
| 1SAX101911R1002 | DRS-F-02 Remote Reset Coil  | DRS-F-02    | 1        | piece           |
| 1SAX101911R1003 | DRS-F-03 Remote Reset Coil  | DRS-F-03    | 1        | piece           |
| 1SAX101911R1004 | DRS-F-04 Remote Reset Coil  | DRS-F-04    | 1        | piece           |
| 1SAX101911R1011 | DRS-F-EF-01 Remote Coil     | DRS-F-EF-01 | 1        | piece           |
| 1SAX101911R1012 | DRS-F-EF-02 Remote Coil     | DRS-F-EF-02 | 1        | piece           |
| 1SAX101911R1013 | DRS-F-EF-03 Remote Coil     | DRS-F-EF-03 | 1        | piece           |
| 1SAX101911R1014 | DRS-F-EF-04 Remote Coil     | DRS-F-EF-04 | 1        | piece           |
| 1SAZ701903R1001 | WRH-F Holder                | WRH-F       | 1        | piece           |
| 1SAZ701903R1011 | WRB-400 Bowden Wire         | WRB-400     | 1        | piece           |
| 1SAZ701903R1012 | WRB-600 Bowden Wire         | WRB-600     | 1        | piece           |
| 1SAZ701903R1013 | WRB-1000 Bowden Wire        | WRB-1000    | 1        | piece           |
| 1SAZ701903R1030 | WRBG Gasket                 | WRBG        | 1        | piece           |
| 1SFA616162R1014 | KPR3-101L Reset push button | KPR-101L    | 1        | piece           |

## Categorías

Productos y sistemas de baja tensión → Aparatos de control → Contactores → Relés térmicos electrónicos

