


box terminal 3 units accessory for: 3VA2 250



Model	
product brand name	SETRON
product designation	accessories
Product version	box terminal 3 units
Accessories	Box terminal
General technical data	
designation / of the terminal	TS1.4
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> </ul>	25 mm <sup>2</sup> 185 mm <sup>2</sup>
type of connectable conductor cross-sections / of the laminated conductor rails	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	4 - 6 x 15.5 mm x 0.8 mm 4 - 6 x 20 mm x 1 mm
stripped length	20 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded</li> </ul>	25 - 35 mm <sup>2</sup> : 6 Nm 50 - 185 mm <sup>2</sup> : 12 Nm 35 mm <sup>2</sup> : 6 Nm 50 - 150 mm <sup>2</sup> : 12 Nm
Connections according UL	
stripped length	0.8 in
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for copper cable / finely stranded / minimum</li> <li>for copper cable / finely stranded / maximum</li> <li>for copper cable / finely stranded / with core end processing / minimum</li> <li>for copper cable / finely stranded / with core end processing / maximum</li> </ul>	4 AWG 350 kcmil 4 AWG 350 kcmil 4 AWG 350 kcmil
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded</li> </ul>	4 - 1 AWG: 70 lb-in 1/0 - 350 kcmil: 140 lb-in 4 - 1 AWG: 70 lb-in 1/0 - 350 kcmil: 140 lb-in
Further information	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b> <a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>	
<b>Industry Mall (Online ordering system)</b> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3VA9263-0JA12">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3VA9263-0JA12</a>	
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3VA9263-0JA12">https://support.industry.siemens.com/cs/ww/en/ps/3VA9263-0JA12</a>	
<b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)</b>	

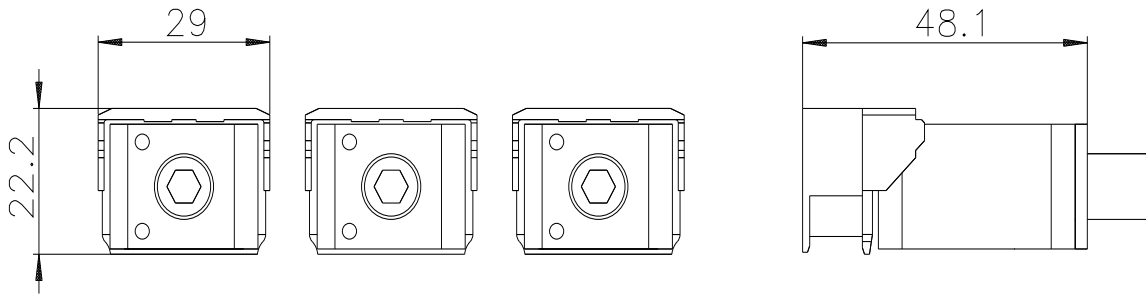

last modified:

7/31/2022 

